

AT04_AT10_AT20 AT26_AT28 LED DOWNLIGHT



* Product features:

- High-quality LEDs provided by Samsung/ Seoul Semiconductor/ Nichia/ Lumiled with excellent performance
- High luminous efficacy up to 115 lm/W
- High CRI of 80/90/Sunlike for high color accuracy
- Die-cast aluminum housing with perfect heat dissipation
- PC cover with high lighting transmittance and desired lighting distribution
- CE, KC certified
- Long lifespan: 30,000 hours, saving the maintenance cost
- Options:



1-CCT: 3000 / 4000 / 5000 / 5700 / 6500K



3-CCT changeable (Adjust by wall switch or switch on driver))



AT04

AT10



AT20

AT26




AT28

* Applications:


- Suitable for Home, office, restaurant, hotel, supermarket, commercial centers, showrooms, etc.

PRODUCT DETAILS


AT04

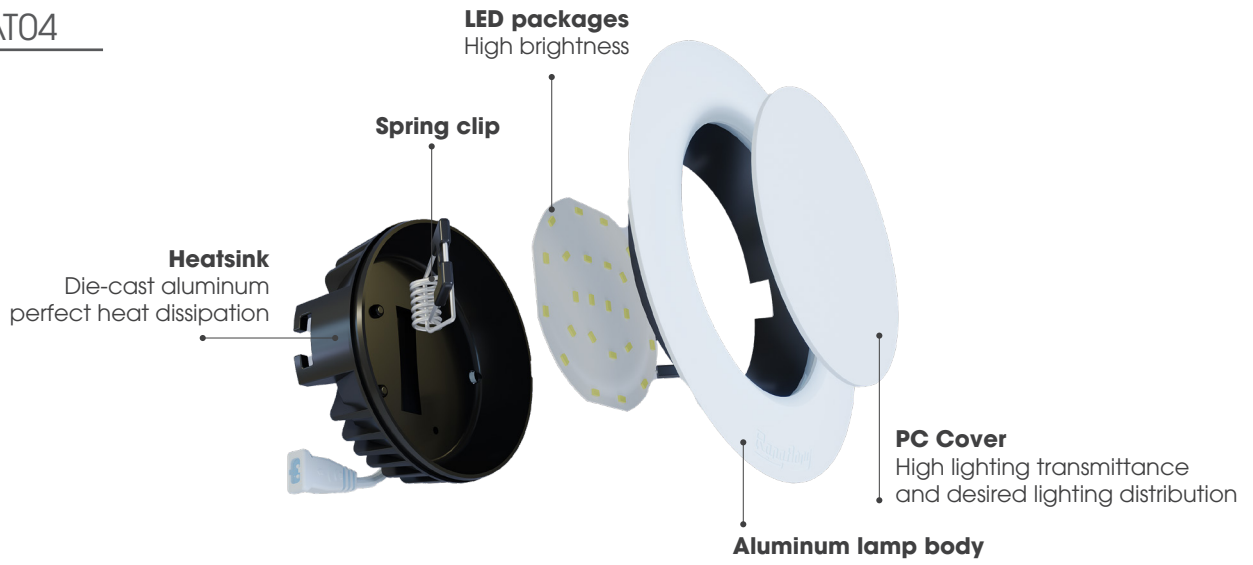


AT10

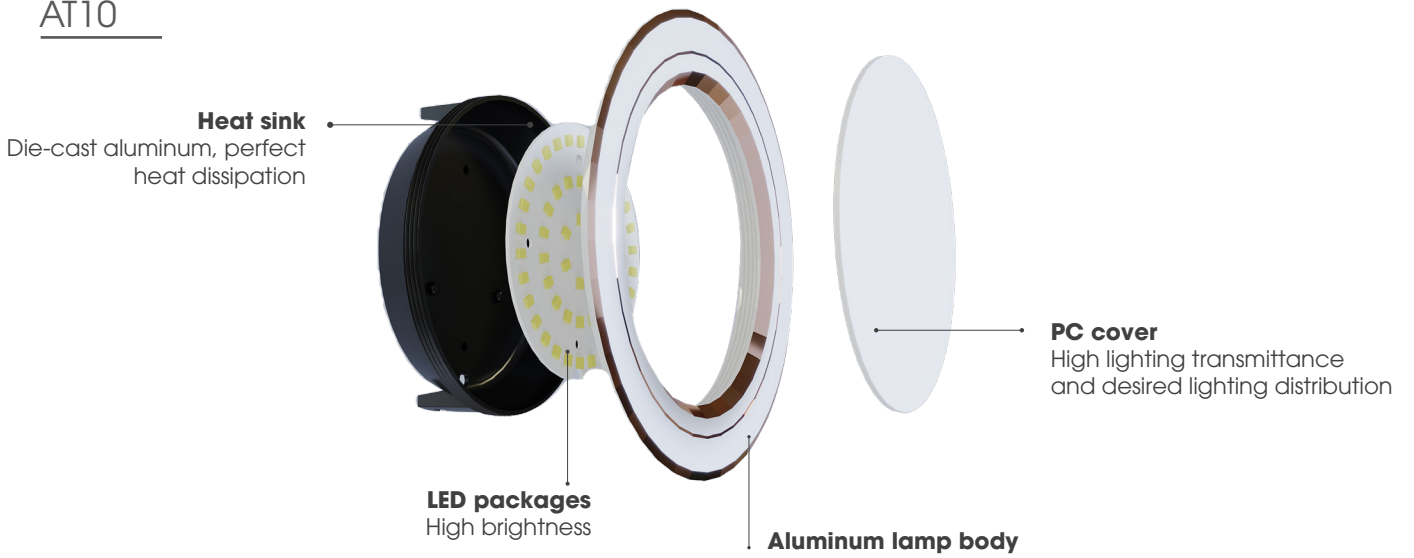


AT20

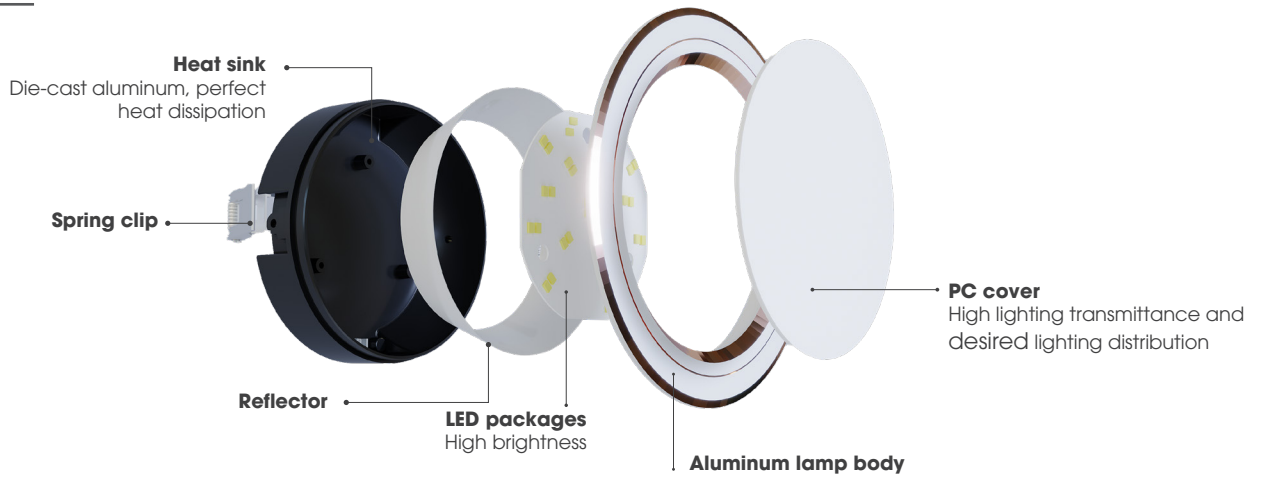


AT26

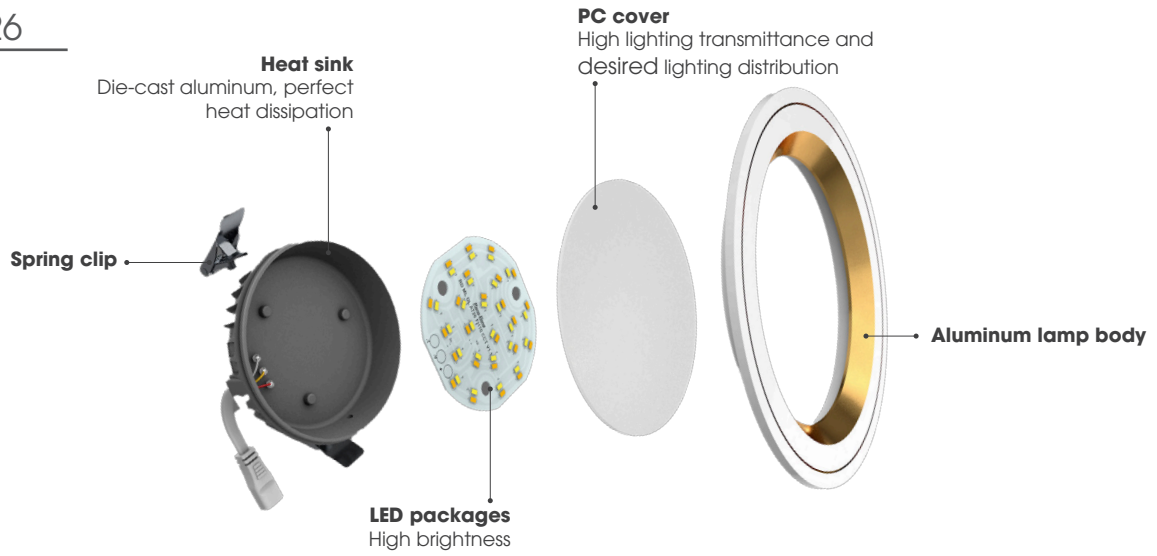

AT28

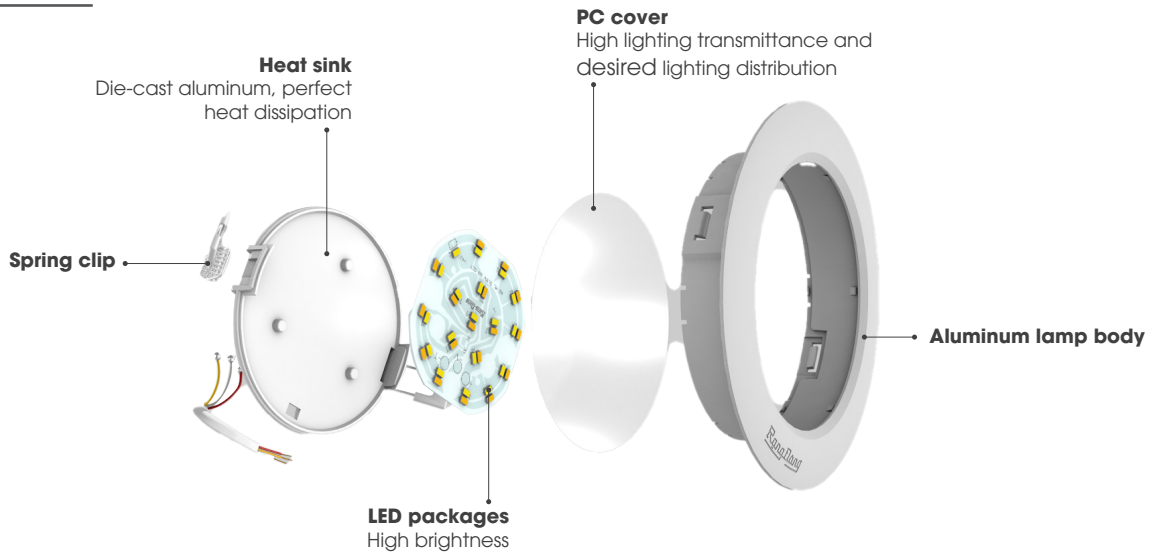

PRODUCT SPECIFICATIONS

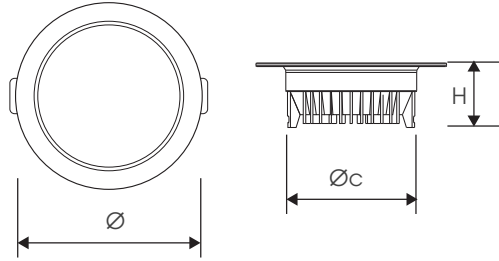


Model	Dimension ØxH (mm)	Power (W)	Voltage (V)	Power factor	Luminous flux (lm)	Luminous efficacy (lm/W)	CCT (K)	CRI (Ra)	Beam angle (°)	Cut out Øc (mm)	Life span (hrs)
AT04 90/5W	118x40	5	120/220÷240/100÷277	0.5/0.9	500	100	3000/4000/5000/5700/6500	80	105	90	30,000
AT04 90/7W	118x40	7	120/220÷240/100÷277	0.5/0.9	700	100	3000/4000/5000/5700/6500	80	105	90	30,000
AT04 110/7W	138x50	7	120/220÷240/100÷277	0.5/0.9	700	100	3000/4000/5000/5700/6500	80	105	110	30,000
AT04 90/9W	118x40	9	120/220÷240/100÷277	0.5/0.9	900	100	3000/4000/5000/5700/6500	80	105	90	30,000
AT04 110/9W	138x50	9	120/220÷240/100÷277	0.5/0.9	900	100	3000/4000/5000/5700/6500	80	105	110	30,000
AT04 110/12W	138x50	12	120/220÷240/100÷277	0.5/0.9	1200	100	3000/4000/5000/5700/6500	80	105	110	30,000
AT04 155/16W	180x44	16	120/220÷240/100÷277	0.5/0.9	1600	100	3000/4000/5000/5700/6500	80	105	155	30,000
AT04 155/25W	180x44	25	120/220÷240/100÷277	0.5/0.9	2500	100	3000/4000/5000/5700/6500	80	105	155	30,000
AT10 90/7W	118x33	7	120/220÷240/100÷277	0.5/0.9	700	100	3000/4000/5000/5700/6500	80	110	90	30,000
AT10 110/9W	138x36	9	120/220÷240/100÷277	0.5/0.9	900	100	3000/4000/5000/5700/6500	80	110	110	30,000
AT10 110/12W	138x36	12	120/220÷240/100÷277	0.5/0.9	1200	100	3000/4000/5000/5700/6500	80	110	110	30,000
AT20 DM 90/8W	103x45	8	120/220÷240/100÷277	0.5/0.9	800	100	3000-4000-6500	80	110	90	30,000
AT20 DM 90/10W	103x45	10	120/220÷240/100÷277	0.5/0.9	1000	100	3000-4000-6500	80	110	90	30,000
AT20 DM 110/10W	123x45	10	120/220÷240/100÷277	0.5/0.9	1000	100	3000-4000-6500	80	110	110	30,000
AT20 DM 110/12W	123x45	12	120/220÷240/100÷277	0.5/0.9	1200	100	3000-4000-6500	80	110	110	30,000
AT26 DM 90/8W	118x36	8	120/220÷240/100÷277	0.5/0.9	800	100	3000-4000-6500	80	110	90	30,000
AT26 DM 90/10W	118x36	10	120/220÷240/100÷277	0.5/0.9	1000	100	3000-4000-6500	80	110	90	30,000
AT26 DM 110/10W	138x36	10	120/220÷240/100÷277	0.5/0.9	1000	100	3000-4000-6500	80	110	110	30,000
AT26 DM 110/12W	138x36	12	120/220÷240/100÷277	0.5/0.9	1200	100	3000-4000-6500	80	110	110	30,000
AT28 DM 90/8W	118x36	8	120/220÷240/100÷277	0.5/0.9	800	100	3000-4000-6500	80	110	90	30,000
AT28 DM 110/10W	138x36	10	120/220÷240/100÷277	0.5/0.9	1000	100	3000-4000-6500	80	110	110	30,000
AT28 DM 110/12W	138x36	12	120/220÷240/100÷277	0.5/0.9	1200	100	3000-4000-6500	80	110	110	30,000

Capacity: 11.2 million pieces per year


Customizable: Power (5/7/9/12/16/25W), Voltage (120/220÷240/100÷277), PF (05/09), lm/W (up to 115), CCT (3000/4000/5000/5700/6500K), driver (non-isolated/isolated/Dim- Triac), Cutout (90/110/155 mm) lifespan, etc.

LUMINOUS INTENSITY DISTRIBUTION


5W




7W




9W




12W



16W



25W



PACKING AND TRANSPORTATION

Type of lamps	Quantity in master box (pcs)	Estimated quantity / 20'DC (pcs)	Estimated quantity / 40'HC (pcs)
AT04 90/5W, 7W, 9W	24	42 072	96 600
AT04 110/7W, 9W, 12W	12	26 016	59 748
AT04 155/16W, 25W	12	12 780	29 352
AT10 90/7W	24	42 072	96 600
AT10 110/9W, 12W	12	26 016	59 748
AT20 90/8W, 10W	24	37 920	87 096
AT20 110/10W, 12W	12	26 640	61 164
AT26 DM 90/8W	24	33 984	78 072
AT26 DM 110/10W, 12W	12	24 276	55 740
AT28 DM 90/8W	24	33 672	77 328
AT28 DM 110/10W, 12W	12	23 280	53 472



Customizable according to customer's request



Exported market: South Korea, EU, etc



RANG DONG LIGHT SOURCE AND VACUUM FLASK JOINT STOCK COMPANY

Add: 87- 89 Ha Dinh Street, Thanh Xuan, Hanoi, Vietnam

Tel: (84-24) 3 858 4310 / 3 858 4165

Fax: (84-24) 3 858 5038

Email: export@rangdong.com.vn



Specifications are subject to change without prior notice