

AT25 LED DOWNLIGHT



* Product features:


- High-quality LEDs provided by Samsung/ Seoul Semiconductor/ Nichia/ Lumiled with excellent performance
- High luminous efficacy up to 100 lm/W
- High CRI of 80/90/Sunlike for high color accuracy
- Die-cast aluminum housing with perfect heat dissipation
- PC cover with high lighting transmittance and even lighting distribution
- Square and rectangle shapes with double heads, triple heads, and four heads.
- Targeted beam angle for perfect accent lighting
- Deep reflector for a perfect anti-glare effect
- CE, KC certified
- Long life span: 30,000 hours, saving the maintenance cost

* Applications


Suitable for home, office, restaurant, hotel, supermarket, commercial centers, showrooms, etc.



PRODUCT DETAILS

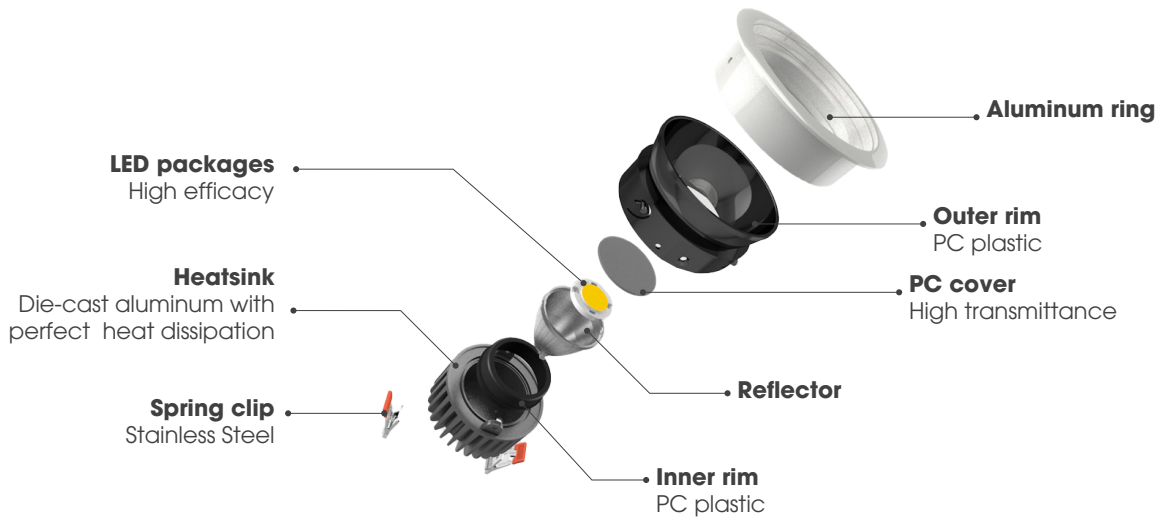

PRODUCT SPECIFICATIONS


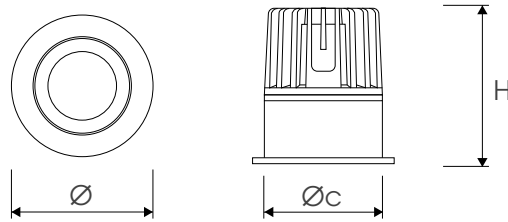


Model	Dimension $\varnothing \times H$ (mm)	Power (W)	Voltage (V)	Power factor	Luminous flux (lm)	Luminous efficacy (lm/W)	CCT (K)	CRI (Ra)	Beam angle (°)	Cut out \varnothing_c (mm)	Life span (hrs)
AT25 80/10Wx1.PLUS	85x76	10	120/220÷240/100÷277	0.5/0.9	1000	100	3000/4000/6500	80/90	24	80	30,000
AT25 80x80/10Wx1.PLUS	88x88x76	10	120/220÷240/100÷277	0.5/0.9	1000	100	3000/4000/6500	80/90	24	80x80	30,000
AT25 80x160/10Wx2.PLUS	88x168x76	20	120/220÷240/100÷277	0.5/0.9	2000	100	3000/4000/6500	80/90	24	80x160	30,000
AT25 80x240/10Wx3.PLUS	88x248x76	30	120/220÷240/100÷277	0.5/0.9	3000	100	3000/4000/6500	80/90	24	80x240	30,000
AT25 160x160/10Wx4.PLUS	168x168x76	40	120/220÷240/100÷277	0.5/0.9	4000	100	3000/4000/6500	80/90	24	160x160	30,000
AT25 100/16Wx1.PLUS	109x88	16	120/220÷240/100÷277	0.5/0.9	1600	100	3000/4000/6500	80/90	24	100	30,000
AT25 108x108/16Wx1.PLUS	115x115x88	16	120/220÷240/100÷277	0.5/0.9	1600	100	3000/4000/6500	80/90	24	108x108	30,000
AT25 108x208/16Wx2.PLUS	115x216x88	32	120/220÷240/100÷277	0.5/0.9	3200	100	3000/4000/6500	80/90	24	108x208	30,000
AT25 108x308/16Wx3.PLUS	115x317x88	48	120/220÷240/100÷277	0.5/0.9	4800	100	3000/4000/6500	80/90	24	108x308	30,000
AT25 208x208/16Wx4.PLUS	216x216x88	64	120/220÷240/100÷277	0.5/0.9	6400	100	3000/4000/6500	80/90	24	208x208	30,000



Customizable: Power (10W/16W/20W/30W/32W/40W/48W/64W), Voltage (120/220÷240/100÷277), PF (05/09), lm/W, CCT (3000/4000/6500K), CRI (80/90/Sunlike), Beam angle (15/24/36 degree), Driver (isolation/ Dim- Triac), life span, etc.

LUMINOUS INTENSITY DISTRIBUTION



AT25 100-16Wx1 PLUS





AT25 108x208-16Wx2 PLUS



AT25 108x308-16Wx3 PLUS



AT25 208x208-16Wx4 PLUS



PACKING AND TRANSPORTATION



Type of lamps	Quantity in master box (pcs)	Estimated quantity / 20'DC (pcs)	Estimated quantity / 40'HC (pcs)
AT25 80/10Wx1.PLUS	24	23 784	54 624
AT25 80x80/10Wx1.PLUS	24	23 784	54 624
AT25 80x160/10Wx2.PLUS	12	13 764	31 608
AT25 80x240/10Wx3.PLUS	8	9 480	21 760
AT25 160x160/10Wx4.PLUS	6	7 104	16 308
AT25 100/16Wx1.PLUS	24	16 512	37 920
AT25 108x108/16Wx1.PLUS	12	15 252	35 028
AT25 108x208/16Wx2.PLUS	12	8 868	20 364
AT25 108x308/16Wx3.PLUS	5	5 090	11 690
AT25 208x208/16Wx4.PLUS	4	4 600	10 564



Exported market: South Korea, EU, etc



RANG DONG LIGHT SOURCE AND VACUUM FLASK JOINT STOCK COMPANY

Add: 87- 89 Ha Dinh Street, Thanh Xuan, Hanoi, Vietnam

Tel: (84-24) 3 858 4310 / 3 858 4165

Fax: (84-24) 3 858 5038

Email: export@rangdong.com.vn



Specifications are subject to change without prior notice