

AT60 LED DOWLIGHT





* Product features:


- High-quality LEDs provided by Samsung/ Seoul Semiconductor/ Nichia/ Lumiled with excellent performance
- High luminous efficacy up to 100 lm/W
- High CRI of 80 for high color accuracy
- Die-cast aluminum housing with perfect heat dissipation
- PC cover with high lighting transmittance and desired lighting distribution
- CE, KC certified
- Long lifespan: 30,000 hours, saving the maintenance cost
- Options:
 - + 1-CCT
 - + 3-CCT changeable (adjust by wall switch or switch on driver)

* Applications:


- Suitable for Home, office, restaurant, hotel, supermarket, commercial centers, showrooms, etc.

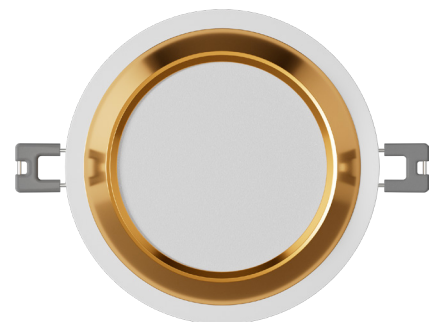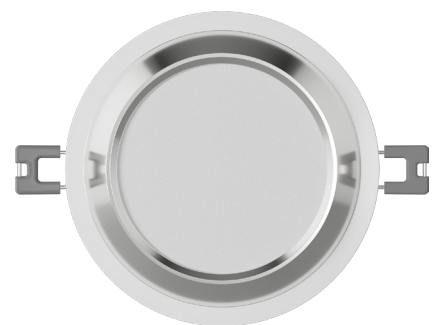

PRODUCT DETAILS

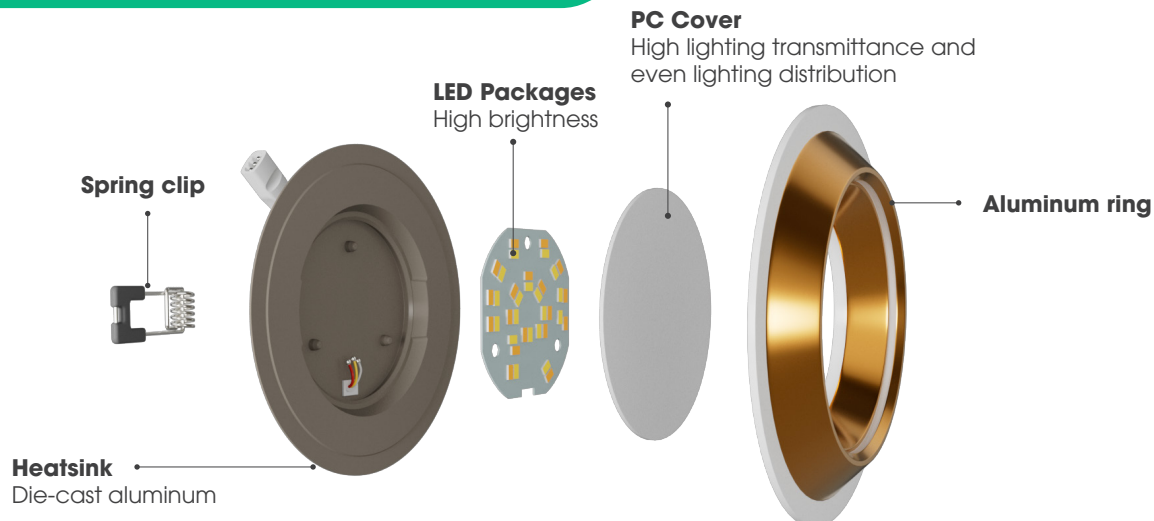

PRODUCT SPECIFICATIONS




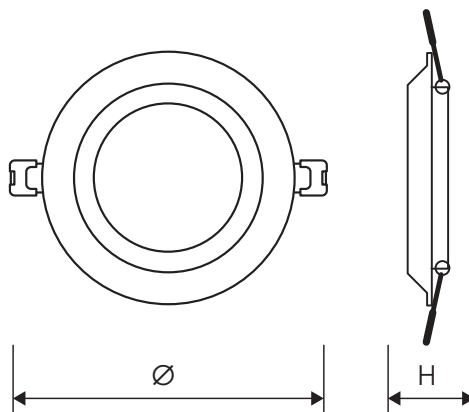


Model	Dimension ØxH (mm)	Power (W)	Voltage (V)	Power factor	Luminous flux (lm)	Luminous Efficacy (lm/W)	CCT (K)	CRI (Ra)	Beam angle (°)	Cut out Φc (mm)	Life span (hrs)
AT60 90/8W	118x22	8	120/220÷240/100÷277	0.5/0.9	800	100	3000/4000/6500	80	105	90	30,000
AT60 90/10W	118x22	10	120/220÷240/100÷277	0.5/0.9	1000	100	3000/4000/6500	80	105	90	30,000
AT60 110/10W	138x22	10	120/220÷240/100÷277	0.5/0.9	1000	100	3000/4000/6500	80	105	110	30,000
AT60 110/12W	138x22	12	120/220÷240/100÷277	0.5/0.9	1200	100	3000/4000/6500	80	105	110	30,000

Capacity: 11.2 million pieces per year

Customizable: Power, Voltage (120/220÷240/100÷277), PF (0.5/0.9), lm/W, CCT (3000/4000/5000/6500K), CRI (80/Sunlike), Driver (non isolation/isolation/Dim- Triac), lifespan, etc.

LUMINOUS INTENSITY DISTRIBUTION

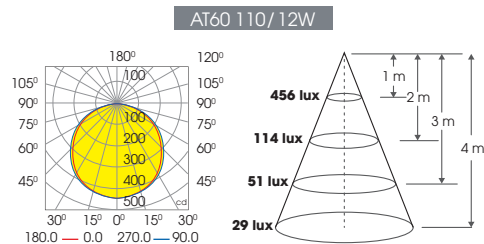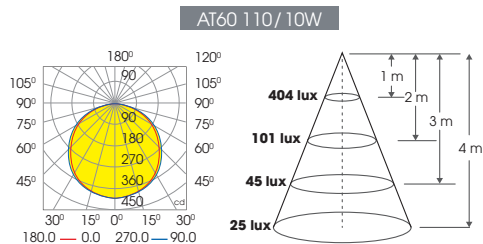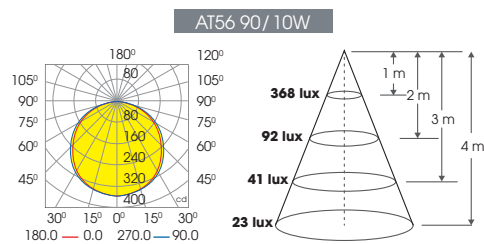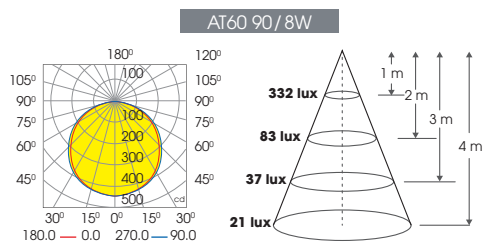

PACKING AND TRANSPORTATION



Type of lamps	Quantity in master box (pcs)	Estimated quantity/ 20'DC (pcs)	Estimated quantity/ 40'HC (pcs)
AT60 90/8W & 10W	24	34 272	78 696
AT60 110/10W & 12W	12	24 144	55 440

Customizable according to customer's request



Exported market: South Korea, EU, etc



RANG DONG LIGHT SOURCE AND VACUUM FLASK JOINT STOCK COMPANY

Add: 87- 89 Ha Dinh Street, Thanh Xuan, Hanoi, Vietnam

Tel: (84-24) 3 858 4310 / 3 858 4165

Fax: (84-24) 3 858 5038

Email: export@rangdong.com.vn



Specifications are subject to change without prior notice