

PT04.V2 LED PANEL




* Product features:

- High-quality LEDs provided by Samsung/ Seoul Semiconductor/ Nichia/ Lumiled with excellent performance
- Die-casting aluminum housing with perfect heat dissipation
- Optical grade and anti-yellowing PMMA light guide plate with high lighting transmittance and even lighting distribution
- Flicker-free; CE, KC certified
- Long life span: 25,000 hours, saving the maintenance cost
- Options:

 1-CCT: 3000/4000/5000 5700/6500K

 3-CCT changeable (adjust by wall switch or switch on driver)




* Applications


- Home, offices, showrooms, restaurants, supermarkets, etc.



PRODUCT DETAILS

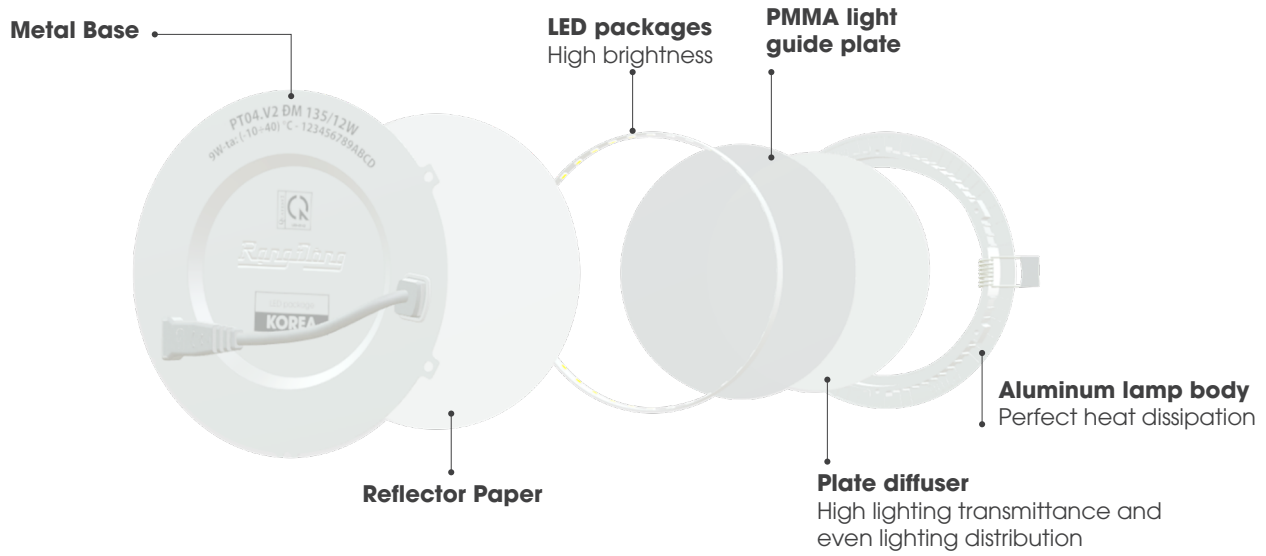

PRODUCT SPECIFICATIONS

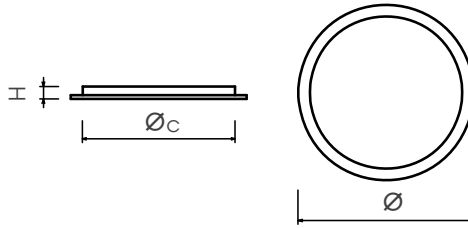


Model	Dimension ØxH (mm)	Power (W)	Voltage (V)	Power factor	Luminous flux (lm)	Luminous Efficacy (lm/W)	CCT (K)	CRI (Ra)	Beam angle (°)	Cut out Øc (mm)	Life span (hrs)
PT04.V2 90/7W	104x10	7	120/ 220÷240/ 100÷277	0.5/0.9	500	71	3000/4000/5000/5700/6500	80	110	90	25,000
PT04.V2 110/7W	122x10	7	120/ 220÷240/ 100÷277	0.5/0.9	550	78	3000/4000/5000/5700/6500	80	110	110	25,000
PT04.V2 110/9W	122x10	9	120/ 220÷240/ 100÷277	0.5/0.9	700	77	3000/4000/5000/5700/6500	80	110	110	25,000
PT04.V2 135/9W	147x10	9	120/ 220÷240/ 100÷277	0.5/0.9	800	88	3000/4000/5000/5700/6500	80	110	135	25,000
PT04.V2 135/12W	147x10	12	120/ 220÷240/ 100÷277	0.5/0.9	1000	83	3000/4000/5000/5700/6500	80	110	135	25,000

Capacity: 28.1 million pieces per year

Customized: Power (7/9/12W), Voltage (120/220÷240/100÷277V), PF (0.5/0.9), CCT (3000/4000/5000/5700/6500K), driver (isolation/ non isolation), Cutout (Øc) (90/110/135 mm), life span, etc.

LUMINOUS INTENSITY DISTRIBUTION

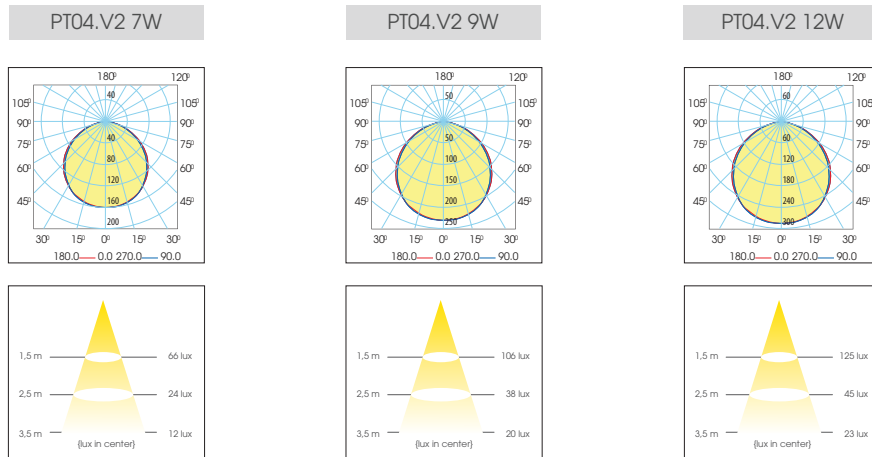

PACKING AND TRANSPORTATION



Type of lamps	Quantity in master box (pcs)	Estimated quantity/ 20'DC	Estimated quantity/ 40'HC
PT04.V2 90/7W	24	61 968	142 272
PT04.V2 110/7W&9W	12	46 032	105 708
PT04.V2 135/9W&12W	12	33 864	77 772



Exported market: EU, South Korea, etc.



RANG DONG LIGHT SOURCE AND VACUUM FLASK JOINT STOCK COMPANY

Add: 87- 89 Ha Dinh Street, Thanh Xuan, Hanoi, Vietnam

Tel: (84-24) 3 858 4310 / 3 858 4165

Fax: (84-24) 3 858 5038

Email: export@rangdong.com.vn



Specifications are subject to change without prior notice