

# AL+ PC LED TUBE



### \* Product features:

- High-quality LEDs provided by Samsung/ Seoul Semiconductor/ Nichia/ Lumiled with excellent performance
- High CRI of 80/90/Sunlike
- High efficacy up to 150 lm/W
- Aluminum heatsink (anodizing or electrostatic powder coating) with perfect heat dissipation
- PC cover with high lighting transmittance and desired lighting distribution
- 140° beam angle reduces waste of lights casted upwards and make LED tube light more brighter
- Double end powered
- CE, KC, UL certified
- Long lifespan: 30,000 hours, saving the maintenance cost
- Options:



1-CCT: 3000/4000/5000/6500K



3-CCT changeable (adjust by wall switch)




Integrated with a Radar sensor

### \* Applications:


- Home, offices, showrooms, restaurants, supermarkets, etc.



## PRODUCT DETAILS

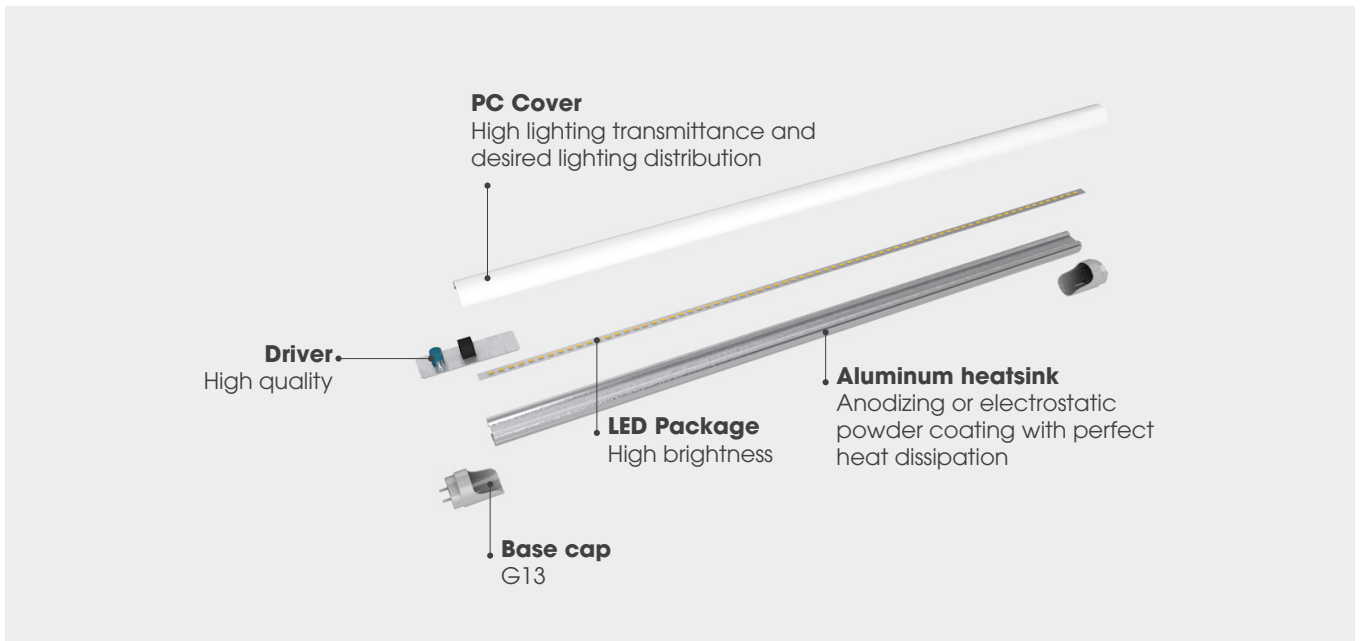

## PRODUCT SPECIFICATIONS

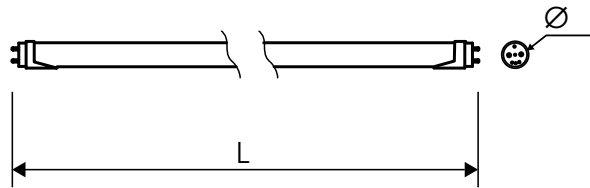


Model	Dimension ØxL (mm)	Power (W)	Voltage (V)	Power factor	Luminous flux (lm)	Luminous Efficacy (lm/W)	CCT (K)	CRI (Ra)	Beam angle (°)	Lifespan (hrs)
T8 600/10W	28x604	10	120/ 220÷240/ 100÷277V	0.5/0.9	1000/1150	100/115	3000/4000/5000/6500	80/90/Sunlike	140	30,000
T8 1200/20W	28x1213	20	120/ 220÷240/ 100÷277V	0.5/0.9	2300/3000	115/150	3000/4000/5000/6500	80/90/Sunlike	140	30,000

**Capacity: 6.7 million pieces per year**

**Customizable:** Power (10/20W), Voltage (120/220÷240/100÷277), PF (0.5/0.9), lm/W (up to 150), CCT (3000/4000/5000/6500K), CRI (80/90/Sunlike), lifespan, etc.

## LUMINOUS INTENSITY DISTRIBUTION

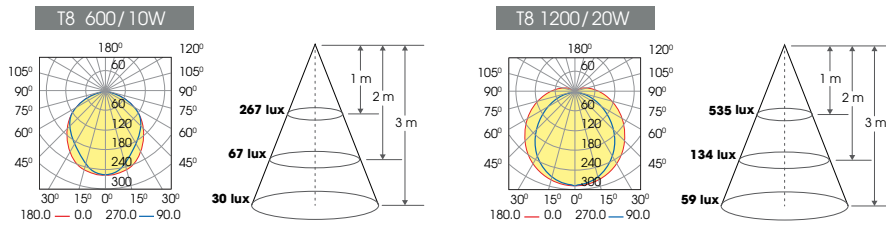

## PACKING AND TRANSPORTATION



Type of lamps	Quantity in master box (pcs)	Estimated quantity/ 20'DC (pcs)	Estimated quantity/ 40'HC (pcs)
T8 600/10W	20	45 600	104 700
T8 1200/20W	20	23 260	53 400

Customizable according to customer's request



Exported market: South Korea, EU, etc



**RANG DONG LIGHT SOURCE AND VACUUM FLASK JOINT STOCK COMPANY**

Add: 87- 89 Ha Dinh Street, Thanh Xuan, Hanoi, Vietnam

Tel: (84-24) 3 858 4310 / 3 858 4165

Fax: (84-24) 3 858 5038

Email: [export@rangdong.com.vn](mailto:export@rangdong.com.vn)



Specifications are subject to change without prior notice