

## CX01 LED CROSS LIGHT CI01 LED LINEAR LIGHT



### \* Product features:


- High-quality LEDs provided by Samsung/ Seoul Semiconductor/ Nichia/ Lumiled with excellent performance
- PC housing with perfect heat dissipation
- PC cover with high lighting transmittance and even lighting distribution
- CE, KC certified
- Long lifespan: 25,000 hours, saving the maintenance cost

### \* Applications

- Residential buildings, commercial buildings, subways, commercial and industrial zones.




CROSS LIGHT

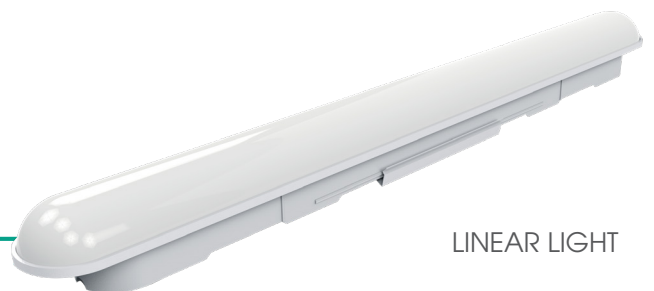


LINEAR LIGHT

## PRODUCT DETAILS


### LINEAR LIGHT

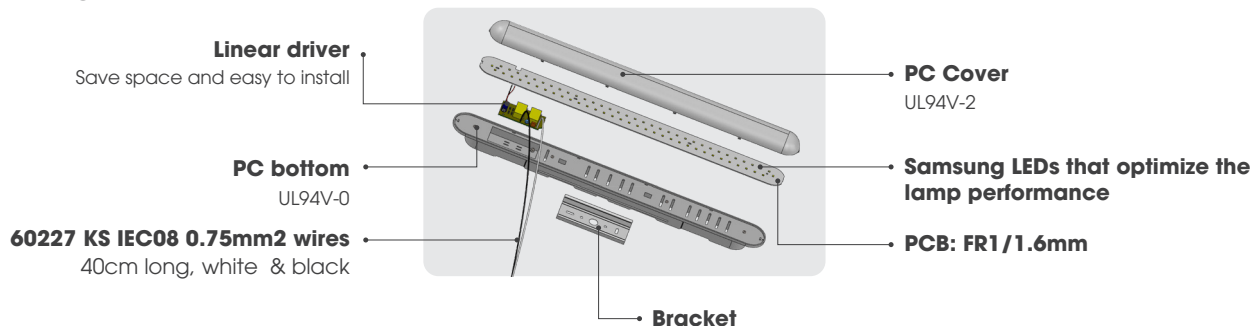

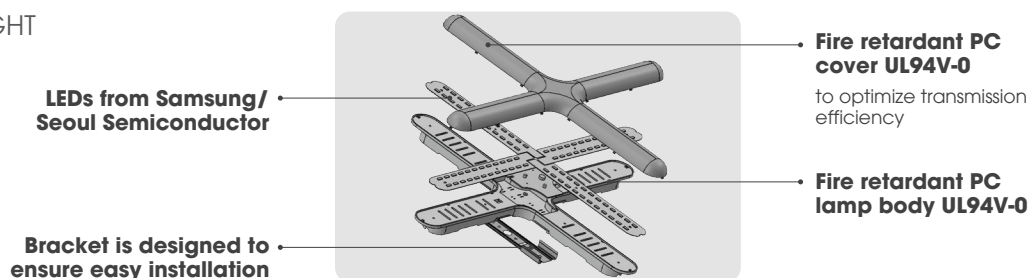


### CROSS LIGHT

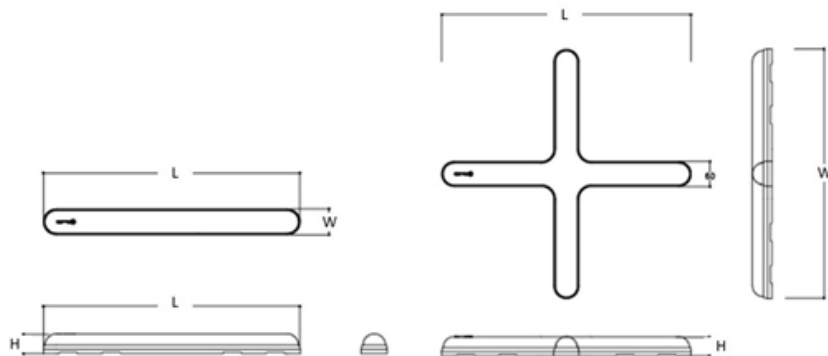

## PRODUCT SPECIFICATIONS



Model	Dimension LxWxH (mm)	Power (W)	Voltage (V)	Power factor	Luminous flux (lm)	Luminous Efficacy (lm/W)	CCT (K)	CRI (Ra)	Beam angle (°)	Lifespan (hrs)	Market
CX01 600x600/50W	600x600x50	50	120/220÷240/100÷277	0.5/0.9	3900/4300	86	3000/4000/5000/5700/6500	80	120	25,000	
CI01 600/30W	600x60x50	30	120/220÷240/100÷277	0.5/0.9	2300	60	3000/4000/5000/5700/6500	80	120	25,000	
CI01 900/50W	900x60x50	50	120/220÷240/100÷277	0.5/0.9	3000	76	3000/4000/5000/5700/6500	80	120	25,000	


**Capacity: Linear light 6.7 million pieces per year**

**Cross light 3.4 million pieces per year**


**Customizable:** Power (30W/50W), Voltage (120/220÷240/100÷277), PF (0.5/0.9), lm/W, CCT (3000/4000/5000/5700/6500K), Material (PC/PP), linear AC direct driver, CRI, lifespan, etc.

## LUMINOUS INTENSITY DISTRIBUTION

CI01 30W

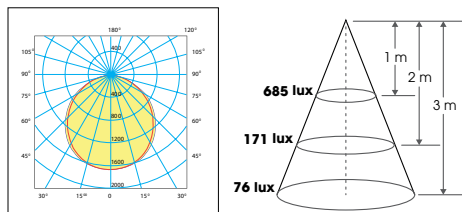

CX01 50W

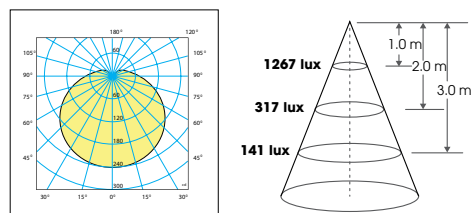

## PACKING AND TRANSPORTATION



Type of lamps	Quantity in master box (pcs)	Estimated quantity / 20'DC (pcs)	Estimated quantity / 40'HC (pcs)
CI01 600/30W	20	10 680	25 000
CI01 900/50W	20	7 540	17 500
CX01 600x600/50W	10	2 500	5 000

Customizable according to customer's request



Exported market: South Korea, EU, etc



**RANG DONG LIGHT SOURCE AND VACUUM FLASK JOINT STOCK COMPANY**

Add: 87- 89 Ha Dinh Street, Thanh Xuan, Hanoi, Vietnam

Tel: (84-24) 3 858 4310 / 3 858 4165

Fax: (84-24) 3 858 5038

Email: export@rangdong.com.vn



Specifications are subject to change without prior notice