

HB08 UFO LED HIGHBAY




* Product features:


- High-quality LEDs provided by Samsung/Seoul Semiconductor/Nichia/Lumiled and driver designed by Rang Dong with excellent performance
- High efficacy up to 145 lm/W
- Die-cast aluminum fin heatsink design with perfect heat dissipation
- PC optical lens with high lighting transmittance and even lighting distribution
- IP65
- CE, KC certified
- Long lifespan: 30,000 hours, saving the maintenance cost
- Options:
 - + Voltage: 120/ 220÷240/ 100÷277V
 - + Driver: non isolation/isolation
 - + Dimming: 0-10V/0 - 100%

* Applications:


- Warehouses, factories, stadiums, tunnels, etc.

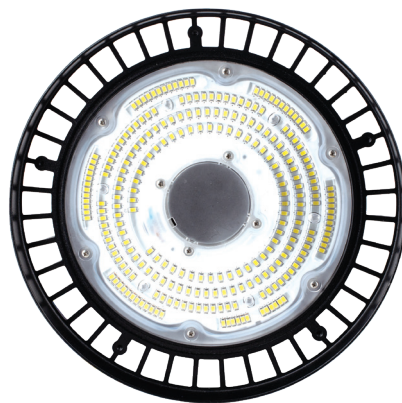

PRODUCT DETAILS

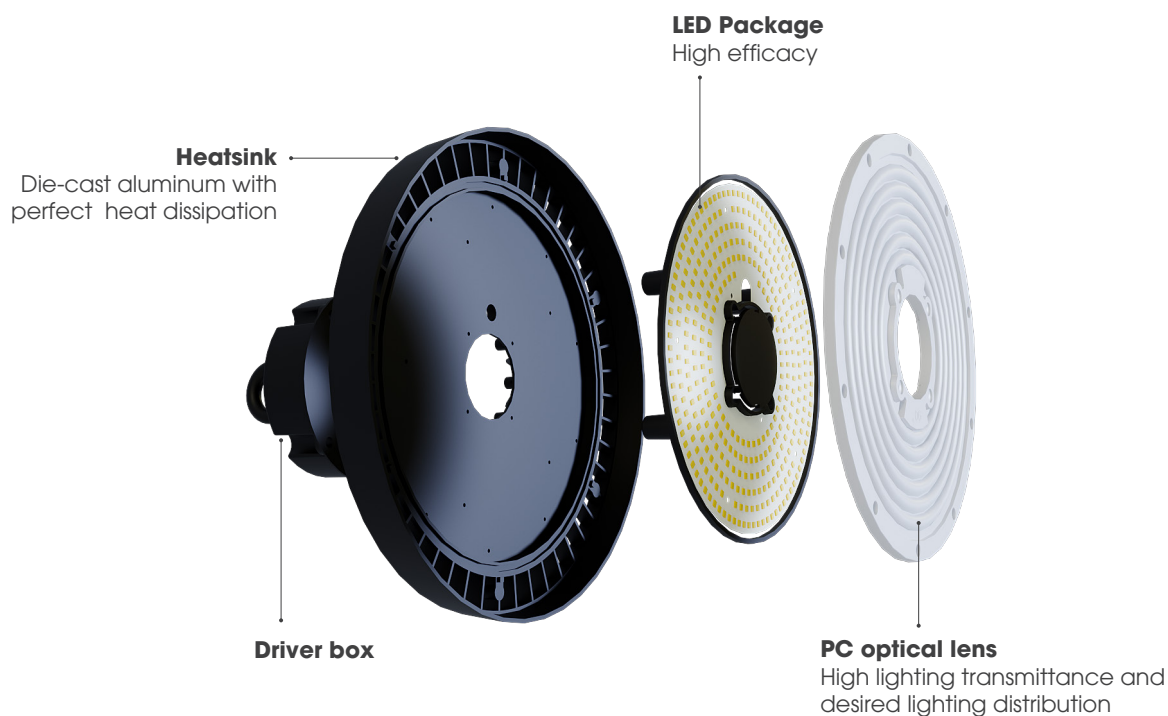

PRODUCT SPECIFICATIONS

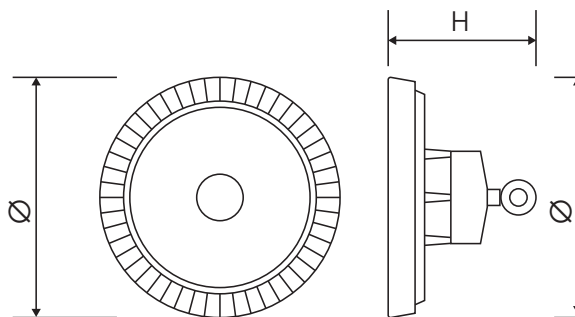



Model	Dimension ØxH (mm)	Power (W)	Voltage (V)	Power factor	Luminous flux (lm)	Luminous Efficacy (lm/W)	CCT (K)	CRI (Ra)	Beam angle (°)	Life span (hrs)
HB08 255/100W	255x180	100	120/220÷240/100÷277	0,95	14000/14500	140/145	3000/4000/6500	80	90	30,000
HB08 300/150W	300x180	150	120/220÷240/100÷277	0,95	21000/21750	140/145	3000/4000/6500	80	90	30,000
HB08 300/200W	300x180	200	120/220÷240/100÷277	0,95	28000/29000	140/145	3000/4000/6500	80	90	30,000

Capacity: 2.0 million pieces per year



Customizable: Power (100/150/200/250W), Voltage (120/220÷240/100÷277), lm/W (up to 145), CCT (3000/4000/6500K), Driver (non isolation/ isolation), lifespan (30,000/ 50,000 hrs), etc.

LUMINOUS INTENSITY DISTRIBUTION



HB08 255/100W



HB08 300/150W

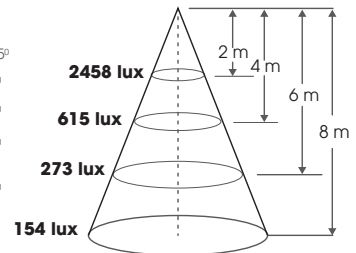

HB08 300/200W



PACKING AND TRANSPORTATION



Type of lamps	Quantity in master box (pcs)	Estimated quantity / 20'DC (pcs)	Estimated quantity / 40'HC (pcs)
HB08 255/100W	1	2 340	5 373
HB08 300/150W, 200W	1	1 897	4 355

Customizable according to customer's request



Exported market: South Korea, EU, etc



RANG DONG LIGHT SOURCE AND VACUUM FLASK JOINT STOCK COMPANY

Add: 87- 89 Ha Dinh Street, Thanh Xuan, Hanoi, Vietnam

Tel: (84-24) 3 858 4310 / 3 858 4165

Fax: (84-24) 3 858 5038

Email: export@rangdong.com.vn



Specifications are subject to change without prior notice